




## Pro-Panel II®

- Exposed fastened, low profile panel
- 36" panel coverage
- Trapezoidal rib on 9" centers
- 5/8" rib height
- Gauges: 29ga and 26ga standard
- Minimum roof slope: 3:12
- Applies over open framing or solid substrate
- Finishes: MS Colorfast45® and Acrylic Coated Galvalume®
- Contact Metal Sales for load-carrying capabilities



### TESTING

- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- Miami-Dade County approved (Wall Application) (NOA 03-0528.08)
- ASTM E455 Diaphragm Test

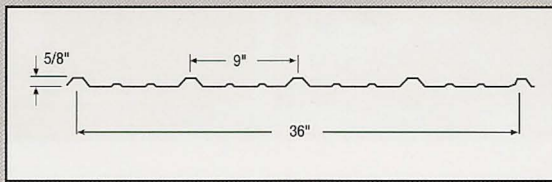

## Classic Rib®

- Exposed fastened, low profile panel
- 36" panel coverage
- Trapezoidal rib on 9" centers
- 3/4" belltop rib height
- Gauges: 29ga and 26ga standard
- Minimum roof slope: 3:12
- Applies over open framing or solid substrate
- Finishes: MS Colorfast45® and Acrylic Coated Galvalume®
- Contact Metal Sales for load-carrying capabilities



### TESTING

- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- ASTM E-564-95 Diaphragm Test
- Florida Building Code Approved (5708.6, 6821.1, 6928.1, 6928.2)
- UL 580 Class 90 Wind Uplift Const. No. 560, 584
- Miami-Dade County Approved (06-0410.08)

