



## Image II

- Architectural concealed-fastened, integral standing rib roof panel
- Panel coverage: 12" or 16"
- 1" rib height
- Gauges: 29ga and 26ga standard
- Minimum roof slope: 3:12
- Applies over solid substrate with 30# felt underlayment
- Finishes: MS Colorfast45®, Kynar 500® (PVDF) and Acrylic Coated Galvalume®
- Contact Metal Sales for load-carrying capabilities

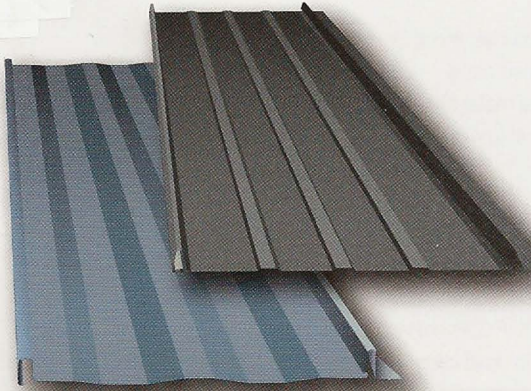


### TESTING

- UL 2218, Class 4 Impact Resistance
- UL 790, Class A Fire Resistance Rating
- Miami-Dade County approved (NOA 05-0919.03)
- ASTM E-1592
- Florida Building Code Approved (5807.5)

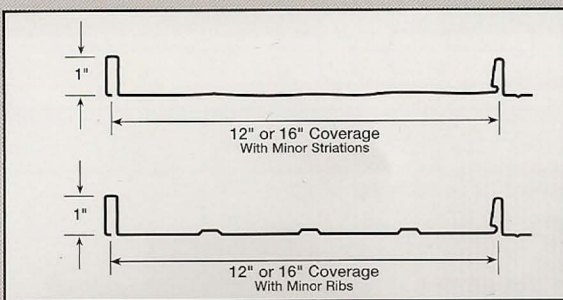

# STRUCTURAL STANDING SEAM PRODUCTS

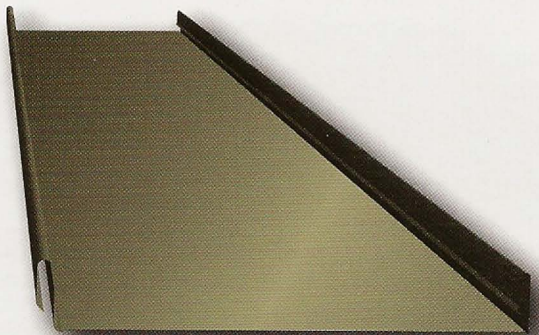


## Vertical Seam

- Architectural/structural standing seam roof panel
- 12", 16", or 18" panel coverage, 1-3/4" rib height
- Gauges: 26ga and 24ga standard, 22ga optional
- Snap-together panel system, minimum roof slope: 3:12
- Factory-applied side lap sealant
- Concealed clip designed for thermal movement
- Accommodates up to 4" blanket insulation
- Applies over open framing or solid substrate
- Finishes: Kynar 500® (PVDF), MS Colorfast45®, and Acrylic Coated Galvalume®
- Contact Metal Sales for additional load-carrying capabilities



### TESTING

- UL-263, Fire Resistance Rating
- UL-2218 Class 4 Impact Resistance
- UL-790 Class A Fire Resistance Rating
- ASTM E-1680 Air Penetration
- ASTM E-1646 Water Infiltration
- UL 580, Class 90 Wind Uplift, Construction Numbers 254, 255, 261, 303, 342, 343, 436, 445, 446, 447, 448
- CECS-07416 US Army Corps of Engineers Rated-ASTM E-1592
- Florida Building Code Approved (5807.3)

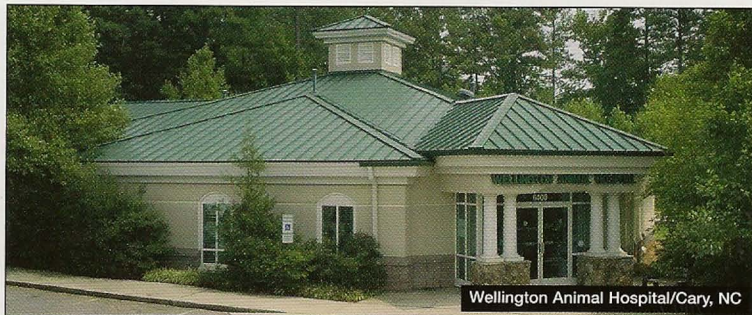

Wellington Animal Hospital/Cary, NC

